


### Industrial Grade SI2 Series

#### Body Style 2

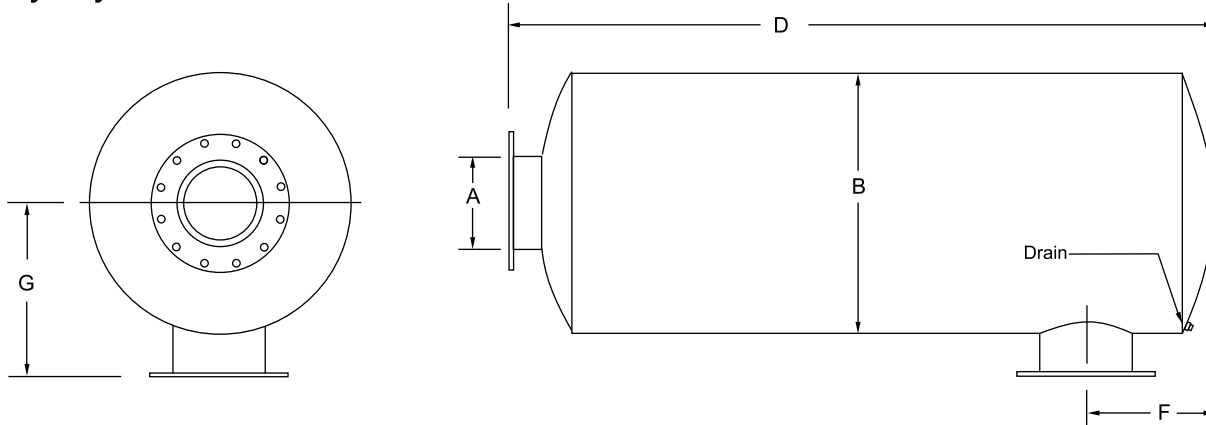

#### Applications


- The SI2 series is intended for use in industrial areas where surrounding noise levels are relatively high
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 12-20 dBA

#### Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
SI2-04-0001	4	10	33	5	9	50
SI2-05-0001	5	10	39	6	9	55
SI2-06-0001	6	12	39	6	10	65
SI2-08-0001	8	18	45	9	13	140
SI2-10-0001	10	22	59	10	15	200
SI2-12-0001	12	24	59	11	16	250
SI2-14-0001	14	30	73	13	19	450

#### Representative Attenuation Curve, SI2 Series

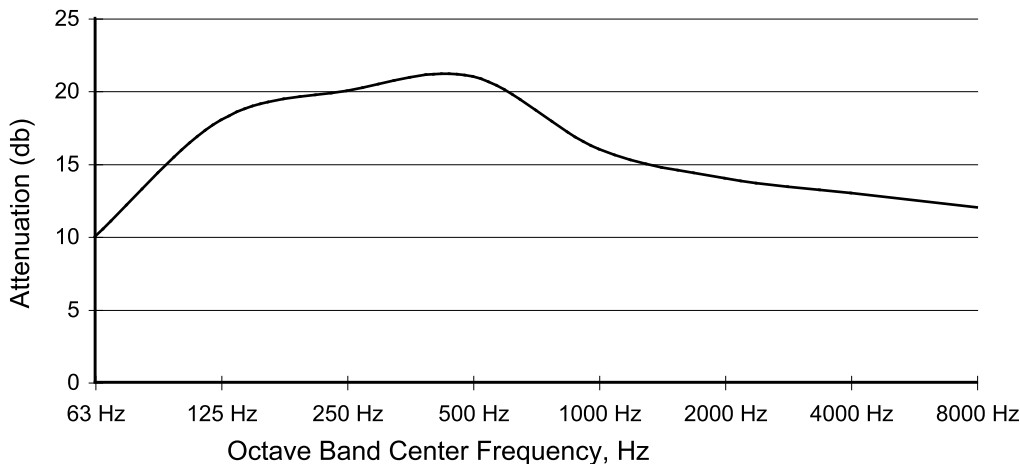

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMES-100 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com