



Standard Silencers

Residential Grade SR1 Series

Body Style 1



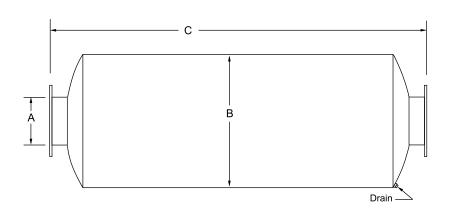

Applications


- The SR1 series is for use where moderate silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 18-25 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

| Α | В | С | WT |
|----|--|---|---|
| 4 | 10 | 46 | 50 |
| 5 | 10 | 54 | 60 |
| 6 | 12 | 54 | 75 |
| 8 | 18 | 61 | 150 |
| 10 | 22 | 75 | 220 |
| 12 | 26 | 75 | 330 |
| 14 | 30 | 100 | 600 |
| 16 | 36 | 114 | 900 |
| 18 | 36 | 126 | 1200 |
| 20 | 42 | 139 | 1400 |
| | 4 5 6 8 10 12 14 16 18 | 4 10 5 10 6 12 8 18 10 22 12 26 14 30 16 36 18 36 | 4 10 46 5 10 54 6 12 54 8 18 61 10 22 75 12 26 75 14 30 100 16 36 114 18 36 126 |

Representative Attenuation Curve, SR1 Series

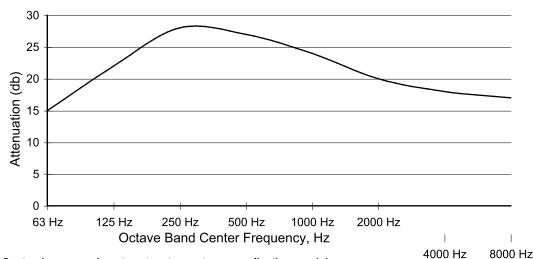

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMES-101 (10/08)

BelMar Industries Ph: 952-486-8588 Fax: 952-486-8289